


# FLOOR DRAINS

## WITH 12" (305) ROUND TOPS

### MEDIUM DUTY DRAINS

**FUNCTION:** Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on grade locations and as flashing clamp when installed in waterproof floors.

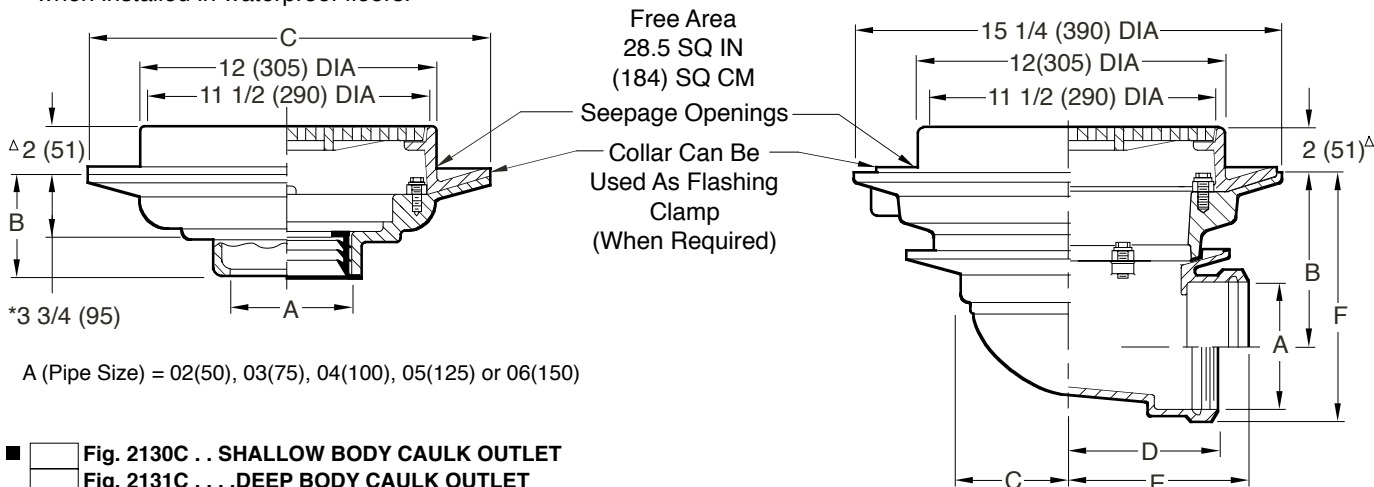

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 2130C . . . SHALLOW BODY CAULK OUTLET
- Fig. 2131C . . . DEEP BODY CAULK OUTLET
- Fig. 2131Y . . . DEEP BODY NO-HUB OUTLET

- Fig. 2135C . . . CAULK OUTLET
- Fig. 2135T . . . THREADED OUTLET

Figure	B			C DIA
	Caulk	Thread	NO-HUB	
2130	3 3/4 (95)	3 3/4 (95)	5 (125)	**15 1/4 (390)
2131	5 (125)	3 3/4 (95)	5 (125)	15 1/4 (390)

\*\* Dimension is 16 (405) for Caulk outlet.

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

**VARIATIONS:**

- Deflector Grate -DG
- Dome Grate -D
- Flat Bottom Strainer -FBS
- Hinged Grate -H
- L Speedi-Set Service Weight 2(50), 3(75) & 4" (100) sizes only (Fig. 2131 only)
- LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) sizes only (Fig. 2131only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2130 & 2135 only)
- Sediment Bucket -B
- Solid Scoriated Cover -SC
- Square Top -S
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19) (Fig. 2131,2131Y & 2135 only)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig. DX2566)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2130 & 2131 Only)

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

\*This Dimension to Internal Stop of Speedi-Set Gasket.  
 Δadd 3/8" (10) when hinged top is specified.  
 Δadd 1/8" (3) when bronze top is specified.  
 ■ Meets U. S. Gov't Spec. WW-P-541-b. Type 220 04" (100) size only.

**NOTE:** 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S2130  
 SIZE: A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: BS  
**2130, 2131, 2135**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>2130, 2131, 2135</b>