


Range : Timed flow toilette flushvalve

Ref : 14109 - PRESTO 1000M

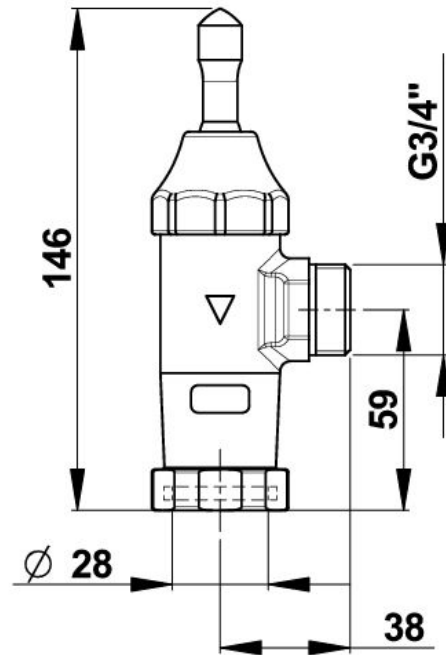

> Dynamic working pressure :

- 1 to 5 bars

> Volume of water delivered :

- 6 to 9 l, adjustable thanks to a stop valve (not integrated)
- Anti-water-hammering device

> Flow time :

- 7 to 9 seconds

> Functionality :

- Simple press on the omnidirectional lever handle to activate the water flow

> Hydraulic supply :

- Right or left square M G 3/4" (20/27)
- Outlet connection on flush pipe Ø 28 mm

> Material and plating :

- Brass body with nickel-chrome plated

> Security :

- Anti-siphon device to prevent pollution of the water network from backflow

> Delivered with :

- Compression washers for pipes dia. 28mm
- Installation instruction

> Standards & Approvals :

- Brass body in accordance with EN1982 / EN12164 / EN12165
- Nickel-Chrome plated body in accordance with EN12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

