


**Range :** Single deck-mounted tap

**Ref :** 64652 - PRESTO 705

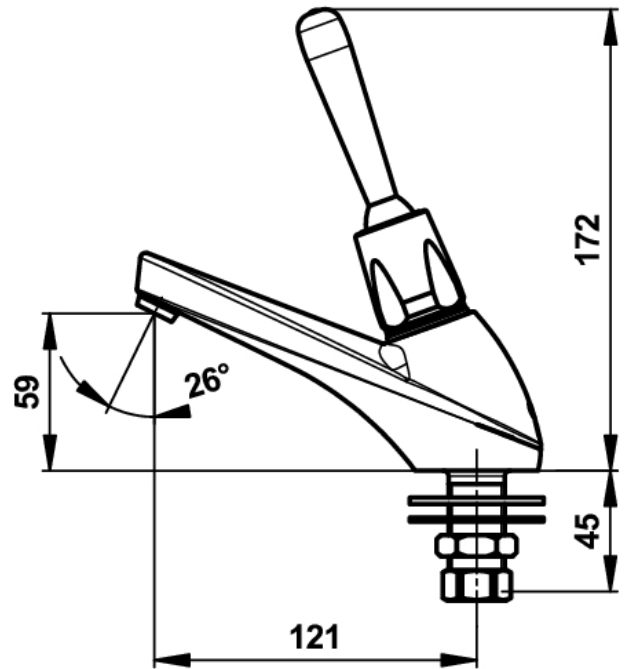

> **Working pressure :**

- 1 to 5 bar

> **Flow :**

- 3 l/min at 3 bar - 4-position flow adjustment device
- Anti-water-hammering design

> **Flow time :**

- 15 seconds ( $\pm 5$  sec.)

> **Operation:**

- Simple press on the lever to activate the water flow

> **Hydraulic supply :**

- M G 1/2" (15x21) - Cold or premixed water

> **Thermal resistance :**

- Resistant to a temperature of 75°C for 30 minute thermal shock

> **Security :**

- Non-removable, wear-proof red or blue marker

> **Delivered with :**

- 1 Nut for 12x14 tube
- 1 Filter gasket
- 1 Stainless steel plain washer
- 1 Brass clamping nut
- 1 Nitrile plain washer
- 2 Non-removable, wear-proof coloured marker
- Instruction manual

> **Standards & approvals :**

- Acoustic class II
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

This document is not contractual. We reserve the right to modify the characteristics of our products without notice in advance. All our brands and models are registered trade marks.

