

# WC FLUSH VALVE 895

895 20 50

**BENKISER**  
ERFINDER SEIT 1909

## WC FLUSH VALVE IN MOUNTING BOX, CONCEALED INSTALLATION

### SPECIAL FEATURES

Concealed WC-flush valve with galvanized mounting box

Comfortable and easy push button operation

Water saving: 6L per flush

Connection alternatively from back, left or right

Automatic regulation of flushing stream and flush volume

Flush valve: Full brass body acc. to TrinkwV

Easy installation

Different cover plates available

Incl. connection bend

### TECHNICAL DETAILS

Operating pressure: 1.2-5.0 bar (17.5-22 PSI)

Flush volume 6 Liter / flush acc. to DIN EN 12541

Built-In Case dimensions: Depth 109 mm plus distance adjustment up to 50 mm

Connection 1"



Optional accessories: Adj. flush pipe (Art. 800 30 70), mounting bar, cover plates, steel-framed mounting element, WC connection set

Brass and plastic parts acc. to UBA and KTW

### MODELS AVAILABLE

895 20 50 : Concealed WC-Flush Valve 1" (DN 25) incl. Built-In Case without Control Panel

895 20 34 : Concealed WC-Flush Valve 3/4" (DN 20) incl. Built-In Case without Control Panel

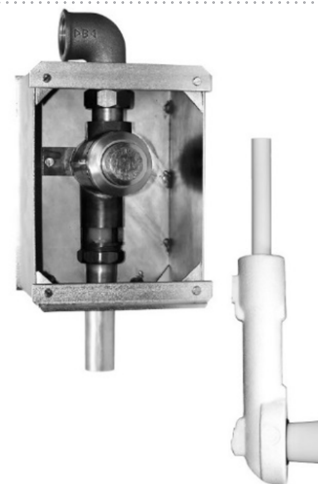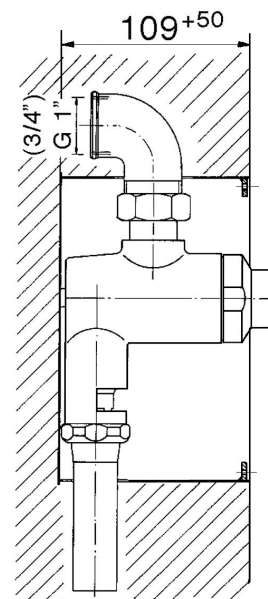

### ADVANTAGES



WATER SAVING



VANDAL PROOF



EASY TO INSTALL

Daimlerstraße 2,  
D-93133 Burglengenfeld, Germany  
Tel. +49 (0) 9471 / 600 93-0  
Fax +49 (0) 9471 / 88 55  
[www.benkiser.de](http://www.benkiser.de)  
[info@benkiser.de](mailto:info@benkiser.de)