



7 m
110 m



PRODUCT BENEFITS

- Suitable for commercial premises
- Ultra-performing grinding with the Pro X K2 grinder (dilaceration system similar to our floor mounted and underground stations)
- Easy access to the electrical chamber

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm

- Access directly to the electrics via the lid




Pro X K2 grinder



PACK CONTAINS

Non-return valve, connectors, activated carbon filter to neutralise odours

FLOW CURVE

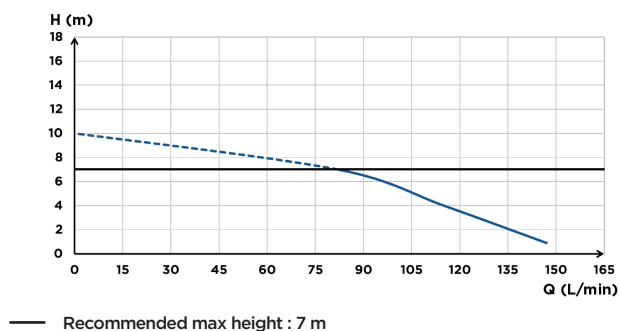

TECHNICAL FEATURES

Number of inlet	4
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Min. shower tray height	150 mm
Activation level	85 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	1100 W
IP rating	IP44
Electrical class	I
Identification and logistics	
Package weight	12,5 kg
EAN code	3308815013039
Factory code	B3PRO

ASSOCIATED PRODUCTS

Sanialarm
3308810042799
ALARM



Sanibroyeur Descaler 2/5 L
3308815090450
DET2LFR
3308819899011
DETFR



DIMENSIONS

